


Intubation Fiberscopes

The Gold Standard for the Anticipated Difficult Airway



- O.D.: 2.8 mm, 3.7 mm, 4.5 mm, 5.2 mm
- Can be used for fiberoptic intubation as well as for bronchoscopy
- Developed for using in the OR, ICU, ER
- Easy to reprocess: manual / mechanical disinfection; STERIS, STERRAD / STERRAD NX, High Level Disinfection (HLD)
- LED Light source with rechargeable Li-Ion batteries
- Extremely bright, white light

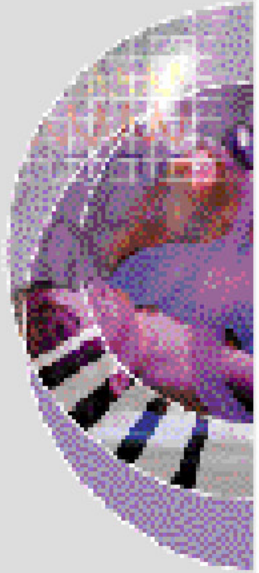


EndoFax
Endo @ Mail

**KARL STORZ
GmbH & Co. KG**

Mittelstraße 8
78532 Tuttlingen/Germany
Postfach 230
78503 Tuttlingen/Germany

Phone: +49 (0)7461 708-0
Fax: +49 (0)7461 708-105
E-Mail: info@karlstorz.de
Web: www.karlstorz.com

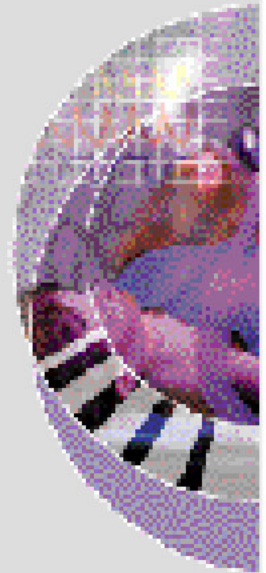

EndoFax
Endo @ Mail

- 11301 AB1 **Intubation Fiberscope 2.8 mm x 50 mm without suction valve**, for neonatal use, instrument channel: 1.2 mm, direction of view: 0°, angle of view: 90°, working length: 50 cm, dist. O.D.: 2.8 mm, deflection up/down: 140°/140°
- 11301 AA1 **Intubation Fiberscope 2.8 mm x 65 mm**, instrument channel: 1.2 mm, direction of view: 0°, angle of view: 90°, working length: 65 cm, dist. O.D.: 2.8 mm, deflection up/down: 140°/140°
- 11302 BD2 **Intubation Fiberscope 3.7 mm x 65 mm**, instrument channel: 1.5 mm, direction of view: 0°, angle of view: 90°, working length: 65 cm, dist. O.D.: 3.7 mm, deflection up/down: 140°/140°
- 11303 BD1 **Intubation Fiberscope 4.5 mm x 65 mm without suction valve**, for fiberoptic intubation, instrument channel: 1.2 mm, direction of view: 0°, angle of view: 110°, working length: 65 cm, dist. O.D.: 4.5 mm, deflection up/down: 140°/140°
- 11301 BN1 **Intubation Fiberscope 5.0 mm x 65 mm**, instrument channel: 2.3 mm, direction of view: 0°, angle of view: 110°, working length: 65 cm, dist. O.D.: 5.2 mm, deflection up/down: 140°/140°
- 11301 DF **LED-Battery Light Source**, rechargeable, with fast screw thread can be connected to all KARL STORZ Endoscopes, brightness > 50.000 lux, color temperature 5.500 K, lithium-ion batteries, charging time: 60 min, burning time at 100 % brightness: 40 min, weight: approx. 150 g, suitable for surface disinfection
- 11301 DG **Charging Unit** for 11301 DE/11301 DF, for two LED-Battery Light Sources with fixed integrated power supply and adaptor for EU, UK, USA and Australia, 110 V-240 VAC/50-60 Hz, suitable for surface disinfection

For ordering one of the above-mentioned Intubation Fiberscopes, you will get **one LED Battery Light Source together with Charging Unit free of charge.**

**KARL STORZ
GmbH & Co. KG**

Mittelstraße 8
78532 Tuttlingen/Germany
Postfach 230
78503 Tuttlingen/Germany

Phone: +49 (0)7461 708-0
Fax: +49 (0)7461 708-105
E-Mail: info@karlstorz.de
Web: www.karlstorz.com